



# INFILTRATION TRENCH

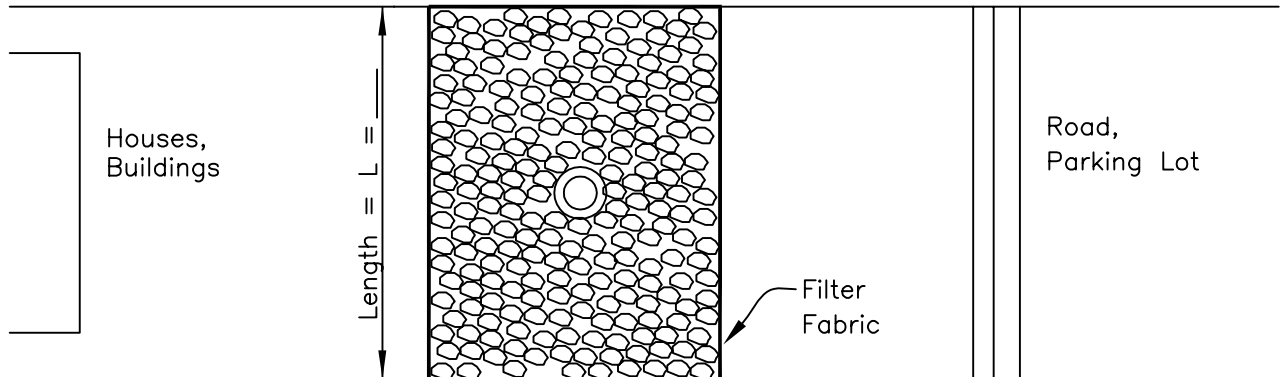

PLAN VIEW

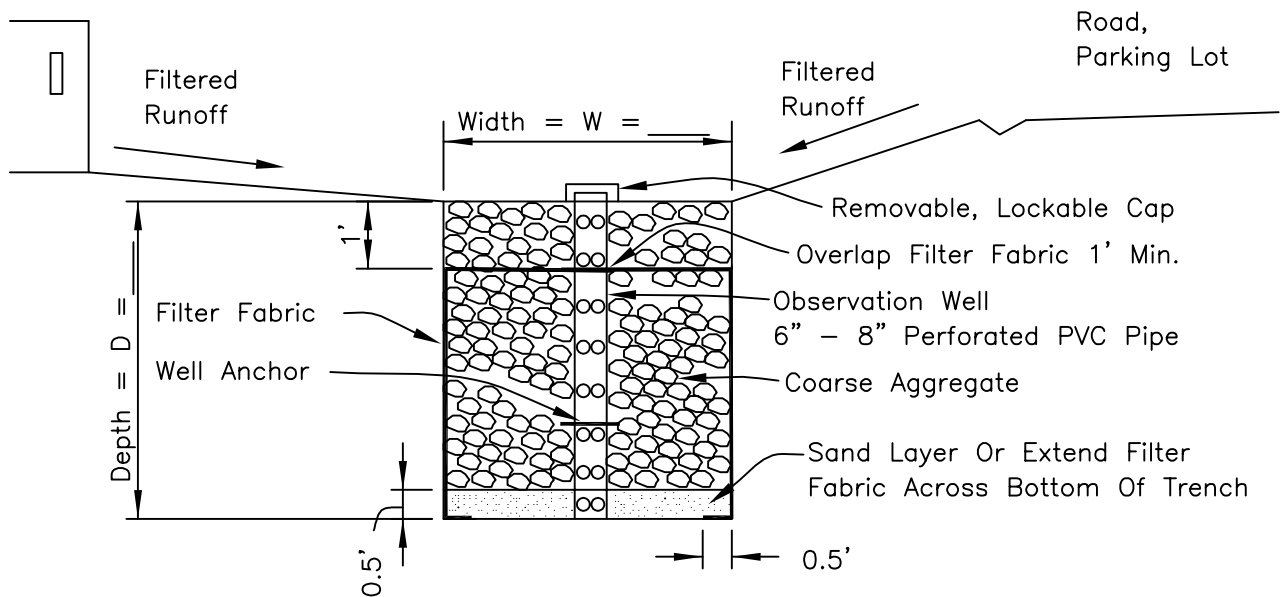

SECTION VIEW

**NOTES:**

1. Coarse aggregates shall meet one of the following IDOT gradations: CA-1 or CA-3.
2. Sand, if used, shall meet one of the following IDOT gradations: CA-14, CA-15 or CA-16.
3. Filter fabric shall meet the requirements of material specification 592 GEOTEXTILE Table 1 or 2, Class I with an apparent opening size of at least 30 for non-woven and 50 for woven.
4. PVC pipe shall meet material specification 547 PLASTIC (PVC, PE, ABS) PIPE.
5. See plans for L, W and D dimensions.

<p><b>REFERENCE</b></p> <p>Project _____</p> <p>Designed _____ Date _____</p> <p>Checked _____ Date _____</p> <p>Approved _____ Date _____</p>		<p>STANDARD DWG. NO.</p> <p style="font-size: 1.2em;">IL-547</p> <p>SHEET 1 OF 1</p> <p>DATE 1-29-99</p>
--	--	--