



PLAN VIEW

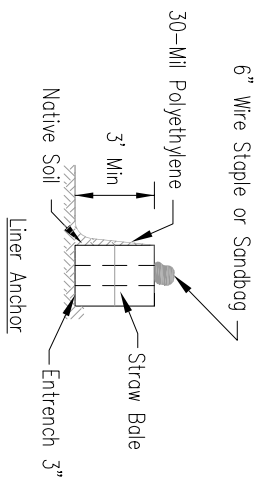

STRAW BALE ANCHOR SECTIONS

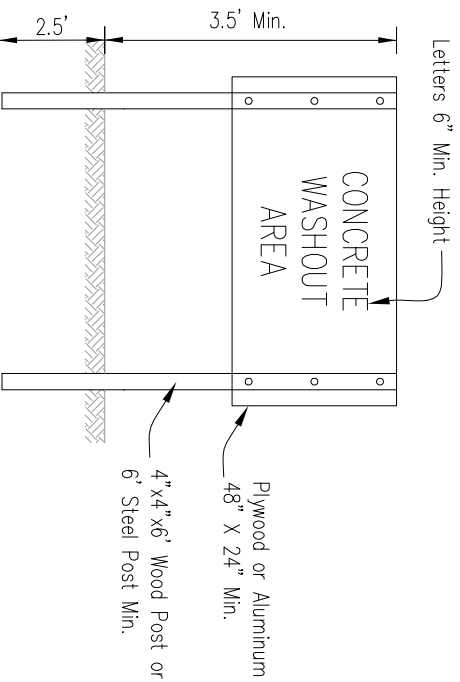

SIGN DETAIL

NOTES:

1. Maintaining temporary concrete washout facilities shall include removing and disposing of hardened concrete and/or slurry and returning the facilities to a functional condition.
2. Facility shall be cleaned or reconstructed in a new area once washout becomes two-thirds full.
3. Each straw bale is to be staked in place using (2) 2"x2"x4' wooden stakes.

Sheet 1 of 3	File No. IUM-654SB	Drawing No.			
TEMPORARY CONCRETE WASHOUT FACILITY – STRAW BALE			Designed _____	Date _____	
			Drawn E. JOHNSON	6/08	
			Checked _____		
			Approved _____		