



# FLOATING SILT CURTAIN - TYPICAL LAYOUT

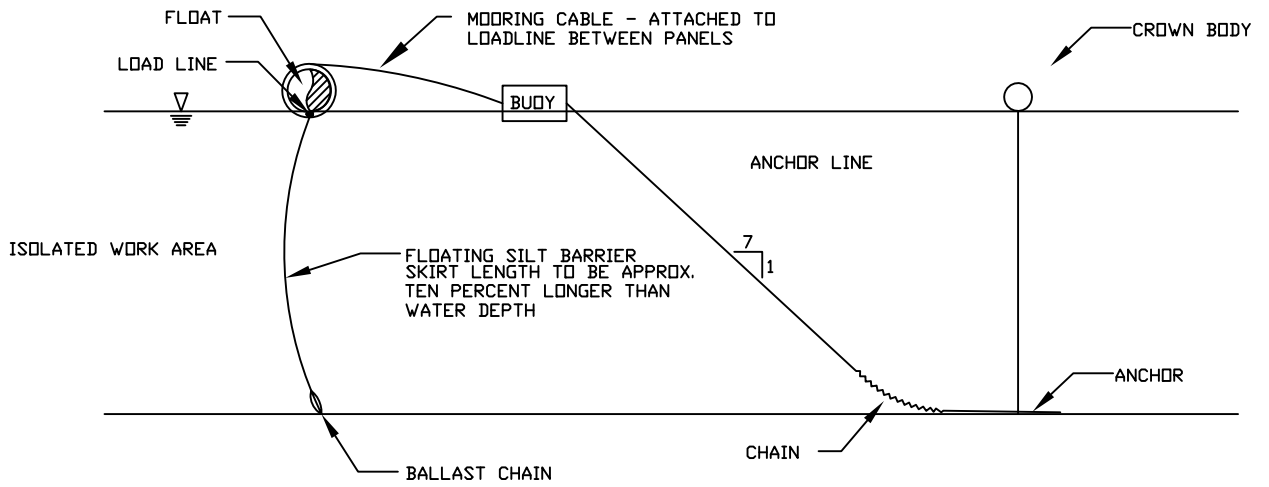

TYPICAL COMPONENTS / ANCHORAGE SYSTEM

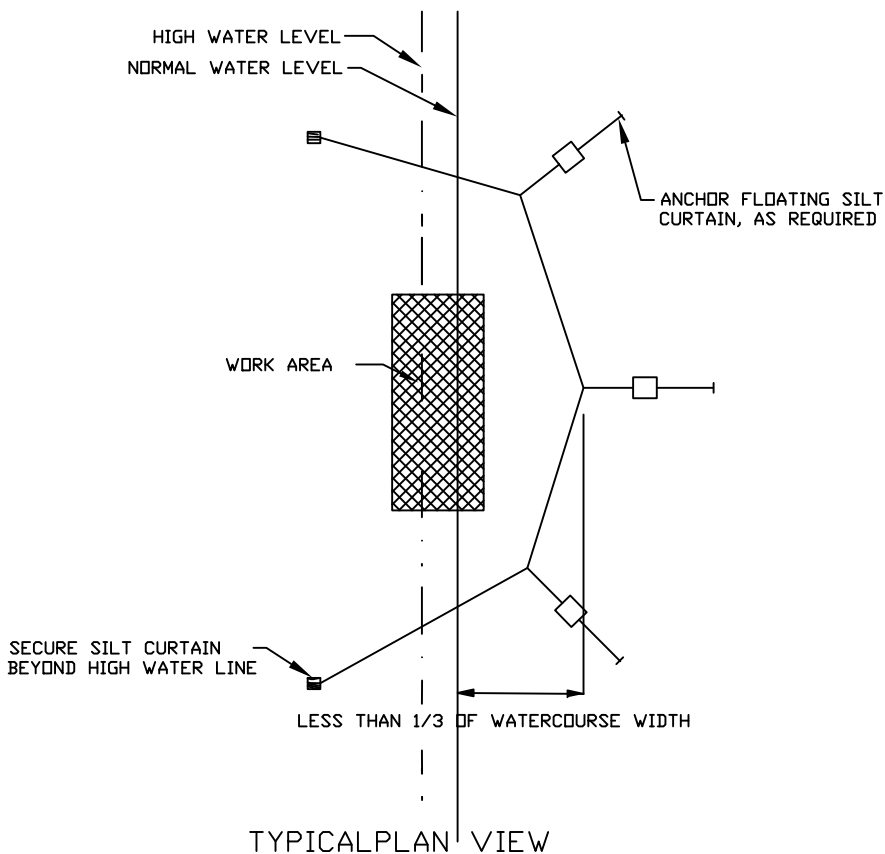

TYPICAL PLAN VIEW

Maximum flow for waterbody shall be less than 5fps.  
 Isolated work area shall not exceed more than 1/3 stream width.  
 Silt curtain shall be placed parallel to stream flow.

REFERENCE  
 Project \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_



STANDARD DWG. NO.  
 IUM-617A  
 SHEET 1 OF 1  
 DATE 1-06-2012