



PLAN VIEW

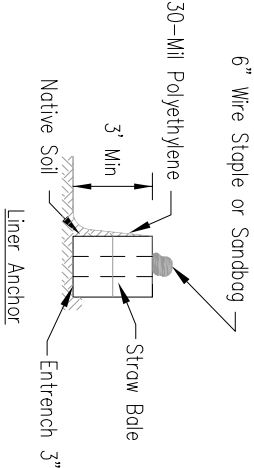

STRAW BALE ANCHOR SECTIONS

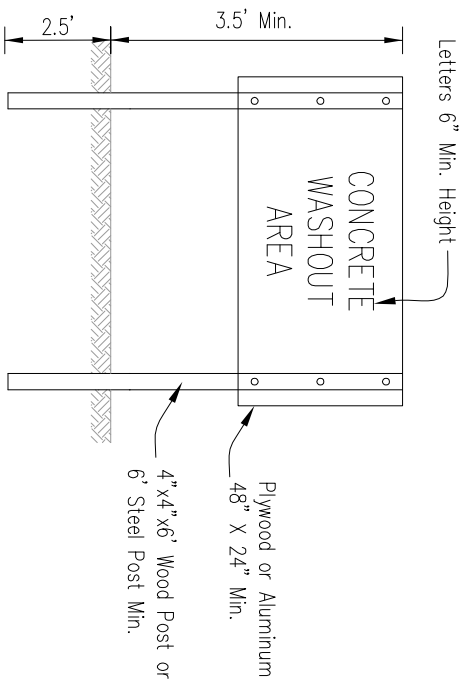

SIGN DETAIL

NOTES:

- 1. Maintaining temporary concrete washout facilities shall include removing and disposing of hardend concrete and/or slurry and returning the facilities to a functional condition.
- 2. Facility shall be cleaned or reconstructed in a new area once washout becomes two-thirds full.
- 3. Each straw bale is to be staked in place using (2) 2"x2"x4' wooden stakes.