


TEMPORARY VEGETATED SWALE PLAN

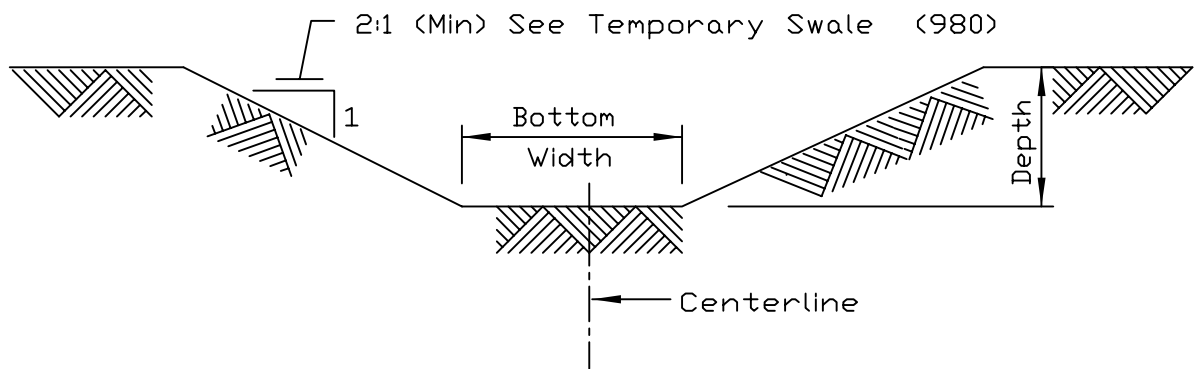

Reach No.			
From Station			
To Station			
Grade, %			
Drainage Area, Ac			
Construction Layout Data			
Top Width, Ft.			
Bottom Width			
Side Slope			
Depth, Ft.			
Stabilization Material			

NOTES:

1. All trees, stumps, brush and debris shall be removed from the construction area and disposed of properly.
2. When required, topsoil shall be salvaged and spread uniformly over disturbed areas.
3. Spoil material from construction will be deposited in low areas or otherwise spread so as not to interfere with flow of water into the swale. Any earth fill shall be compacted to prevent differential settlement in the completed swale. The swale will be constructed to the specified grade, width and depth.
4. If required, excelsior blankets shall meet the requirements of material specification 802 EXCELSIOR BLANKETS and jute netting shall meet the requirements of 801 JUTE NETTING.

REFERENCE
 Project _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____



Natural Resources Conservation Service

NRCS

STANDARD DWG. NO.
 IL-680V
 SHEET 1 OF 1
 DATE 11-21-01