




PLAN VIEW

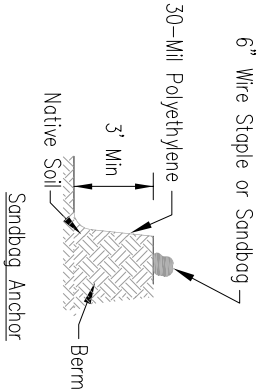

EARTHEN BERM ANCHOR SECTIONS

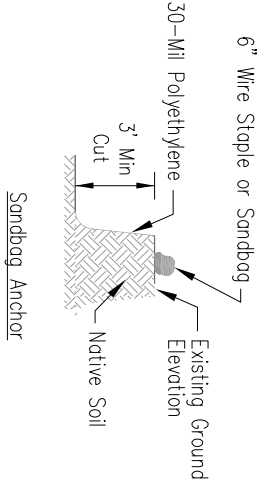

SUBGRADE ANCHOR SECTIONS

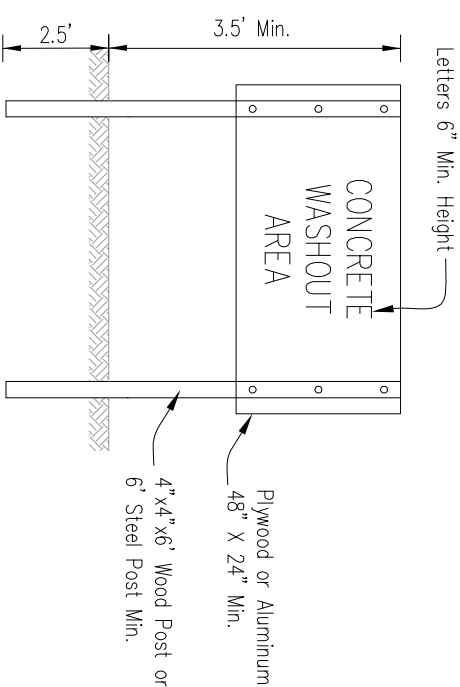

SIGN DETAIL

NOTES:

1. Maintaining temporary concrete washout facilities shall include removing and disposing of hardend concrete and/or slurry and returning the facilities to a functional condition.
2. Facility shall be cleaned or reconstructed in a new area once washout becomes two-thirds full.

Sheet 2 of 3	File No. IUM-654ET	Drawing No.	TEMPORARY CONCRETE WASHOUT FACILITY – EARTHEN TYPE	Designed _____ Drawn B. JOHNSON Checked _____ Approved _____	Date 6/08
--------------	--------------------	-------------	--	---	--------------