



PAVED FLUME

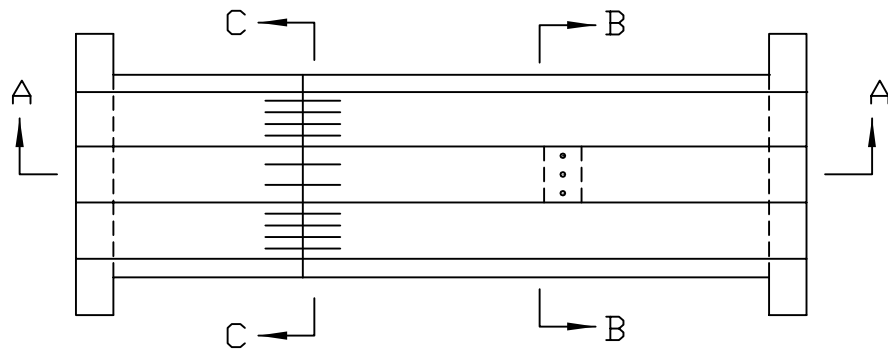


PLAN VIEW

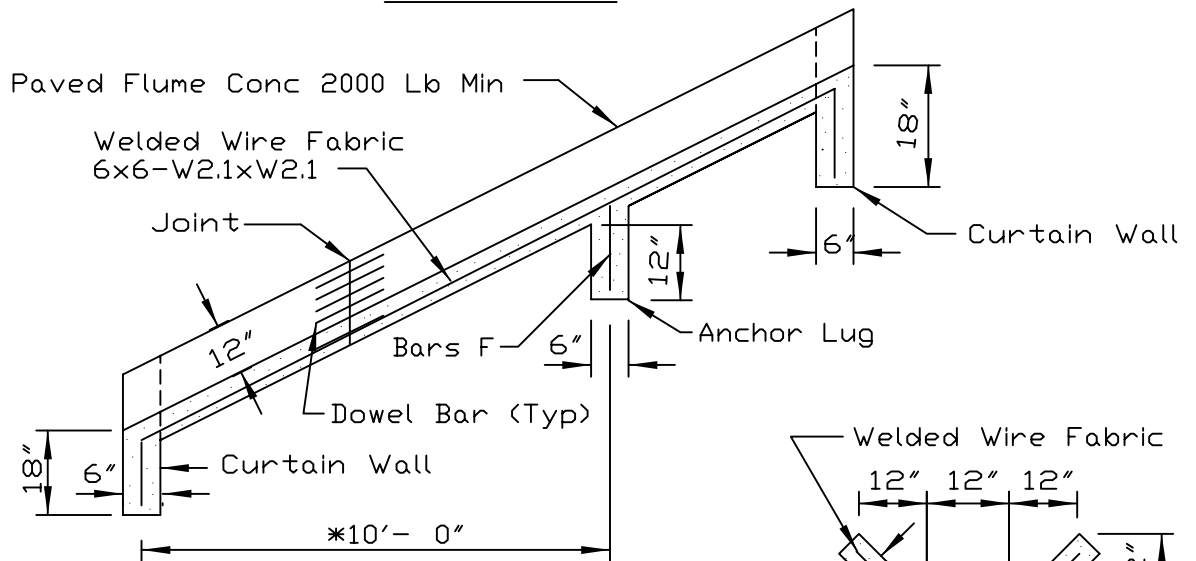

SECTION A-A

*The maximum typical spacing between Anchor Lugs and Curtain Walls shall be 10'-0" from center to center.

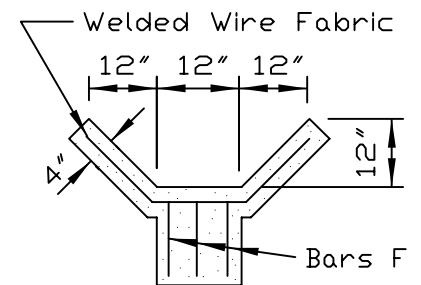


SECTION B-B

SCHEDULE OF REINFORCING STEEL

MARK	NO.	LENGTH	SIZE	SPACING C-C	TYPE
F	3	1'- 1"	4"	4"	Str
G	9	1'- 3"	4"	6'	Str
Dowels	10	1'- 6"	4"	5"	Str

No. shown are for each anchor lug, curtain wall and joint.

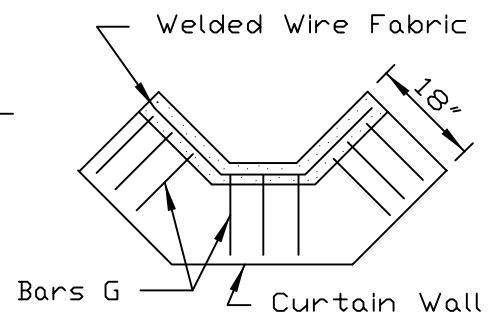

SECTION C-C

REFERENCE

Project _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____



Natural Resources Conservation Service

NRCS

STANDARD DWG. NO.

IL-567

SHEET 1 OF 1

DATE 9-23-93