



RIGHT OF WAY DIVERSION PLAN

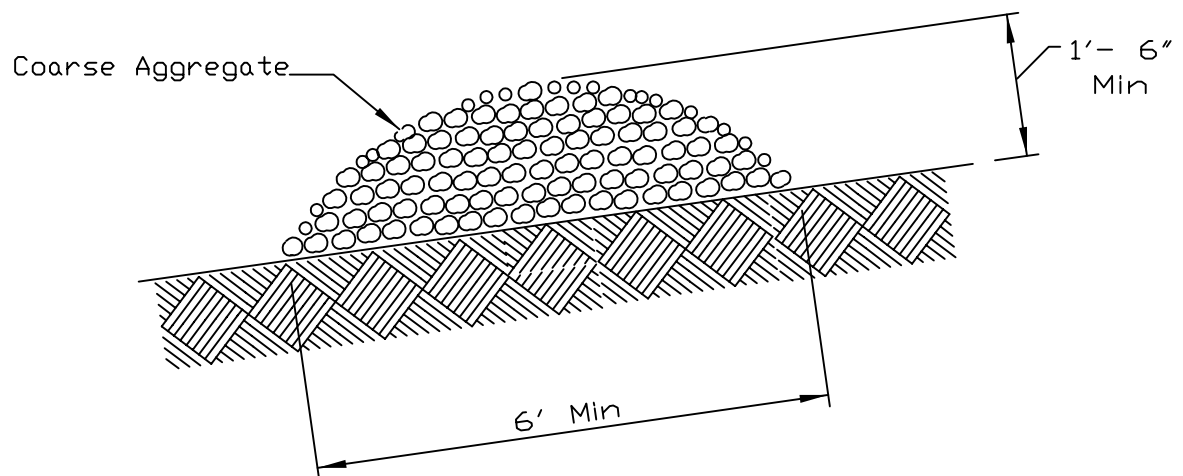

TYPICAL GRAVEL STRUCTURE

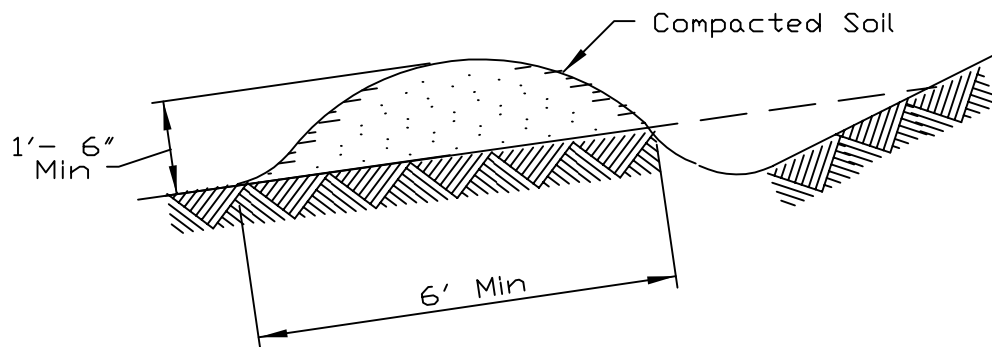

TYPICAL EARTHEN STRUCTURE

NOTES:

1. Install the diversion as soon as right-of-way has been cleared and graded.
2. Disc the base for the constructed ridge before placing fill.
3. Track the ridge to compact it to the design cross section.
4. Locate the outlet on an undisturbed area. Adjust field spacing of the diversion to use the most stable outlet areas. When natural areas are not deemed satisfactory, provide outlet protection.
5. Immediately seed and mulch the portions of the diversions not subject to construction traffic. Stabilize with gravel areas to be crossed by vehicles.
6. Coarse aggregate, if used, shall meet one of the following IDOT gradations: CA-1, CA-2, CA-3, OR CA-4.

REFERENCE

Project _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____



Natural Resources Conservation Service

NRCS

STANDARD DWG. NO.

IL-600

SHEET 1 OF 1

DATE 3-3-95