



# FLOATING SILT CURTAIN - TYPICAL LAYOUT

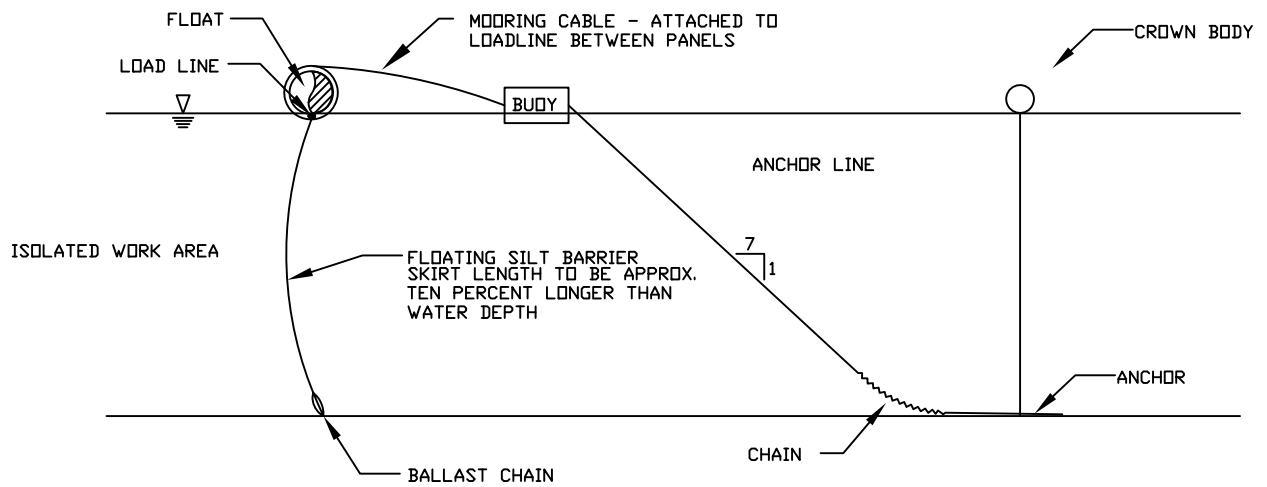

TYPICAL COMPONENTS / ANCHORAGE SYSTEM

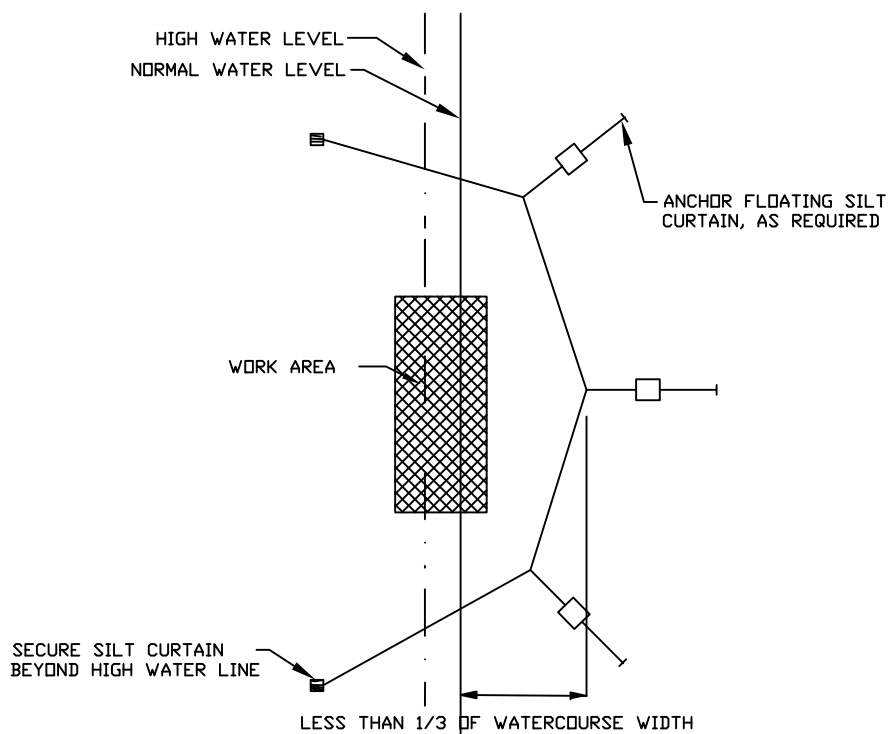

TYPICAL PLAN VIEW

Maximum flow for waterbody shall be less than 5fps.  
 Isolated work area shall not exceed more than 1/3 stream width.  
 Silt curtain shall be placed parallel to stream flow.

## REFERENCE

Project \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_



## STANDARD DWG. NO.

IUM-617A

SHEET 1 OF 1

DATE 1-06-2012