


# TEMPORARY SOIL STOCKPILE DETAIL

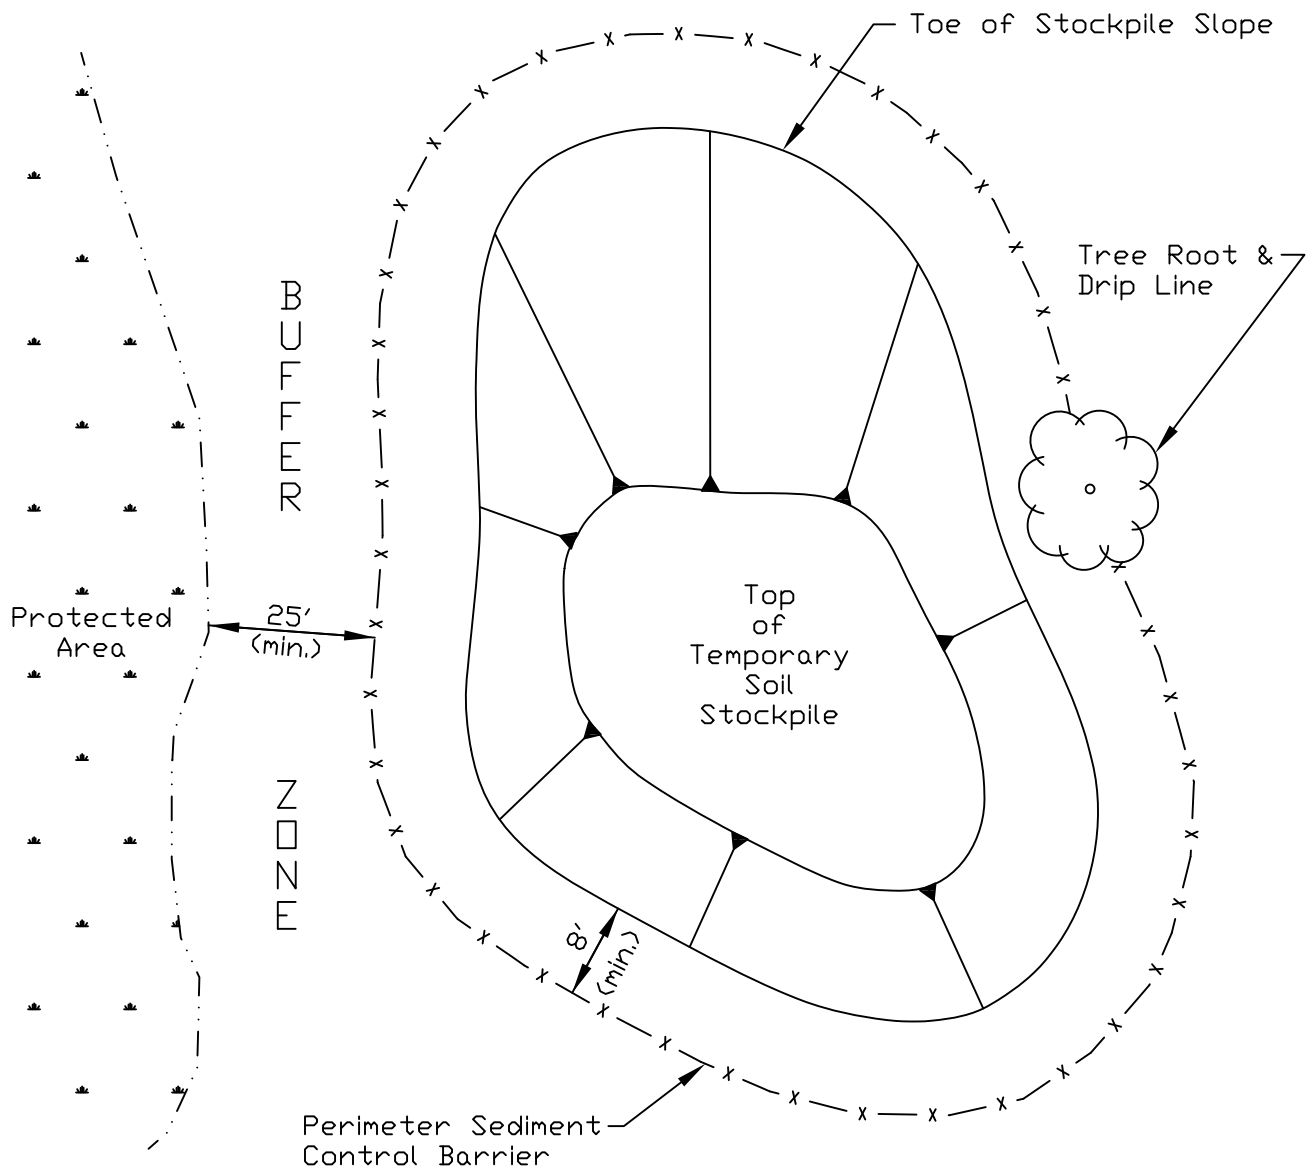

## NOTES:

1. Stockpile slopes should be based on angle of repose of the soil material to avoid potential sloughing of the slope.
2. Soil stockpile to be stabilized in accordance with practical standards.
3. Do not locate stockpile within overland drainage flow path, designated floodways, drip line or over the root crown of adjacent trees.
4. Provisions for sediment control practices may be required along haul roads and entrance/exit locations for access the soil stockpile that can create flow path for stormwater runoff.
5. Installation of benches, terraces, or slope interrupters should be considered.
6. Avoid building soil stockpiles on impervious surfaces.
7. Linear sediment trap surrounding the stockpile base may be used to control sediment.

## REFERENCE

Project \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_



STANDARD DWG. NO.

IUM-627

SHEET 1 OF 1

DATE JANUARY 2017